

Fig 1A 200

62

SLOTTED STRAND PULLING
LEG (FITS FULL DEPTH IN STEM
WITH CLEARANCE) FOR EASY
OFFLOADING OF BULKHEADS

BULKHEAD LIFTING
FRAME
(AUTOMATICALLY ALIGNS
STRAND HOLES)

NOT A PART OF STRAND CUTTER
PORTION AT EXTRA COST

204

CURT BULKHEAD

D 16

BULKHEADS

202

10' 8" APPROX

60

AS REQD
SHOWN AS
20

17' 3"

AS REQD
SHOWN

14' 4" APPROX



FEEDER CLAMP


56

PATENTS APPLIED FOR

98

250

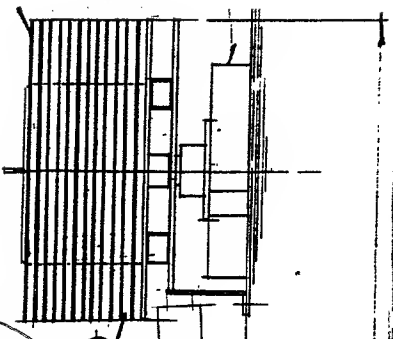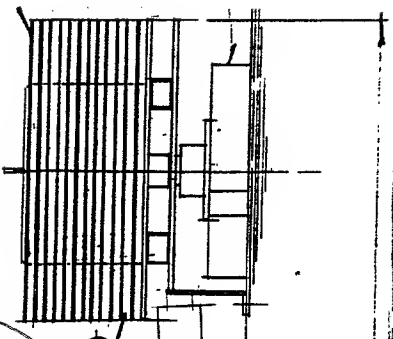

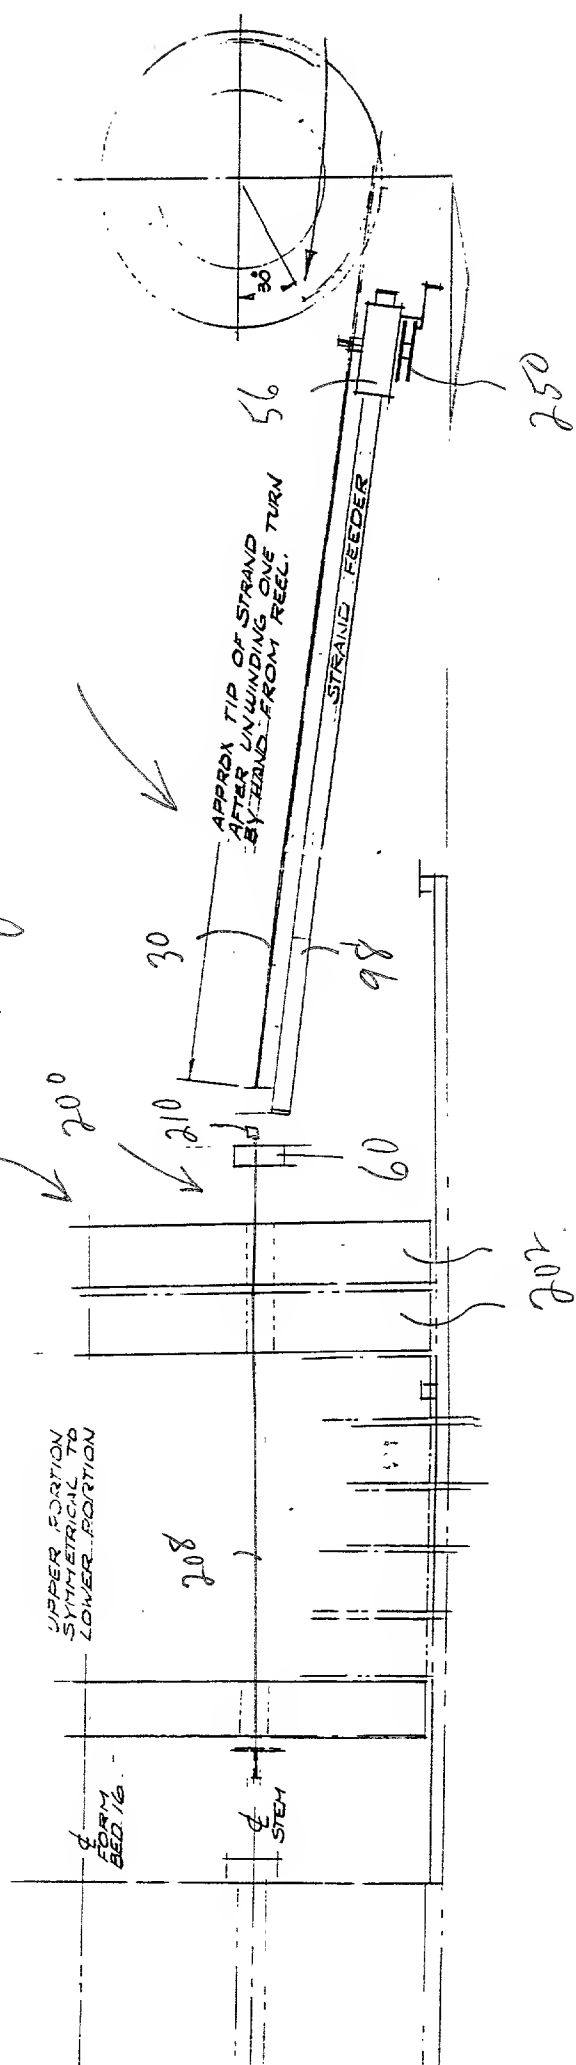

REEL STANDS, REELS, STRAND FEEDER
& HANDWINCH ARE OFF PAGE

Fig 1C 30


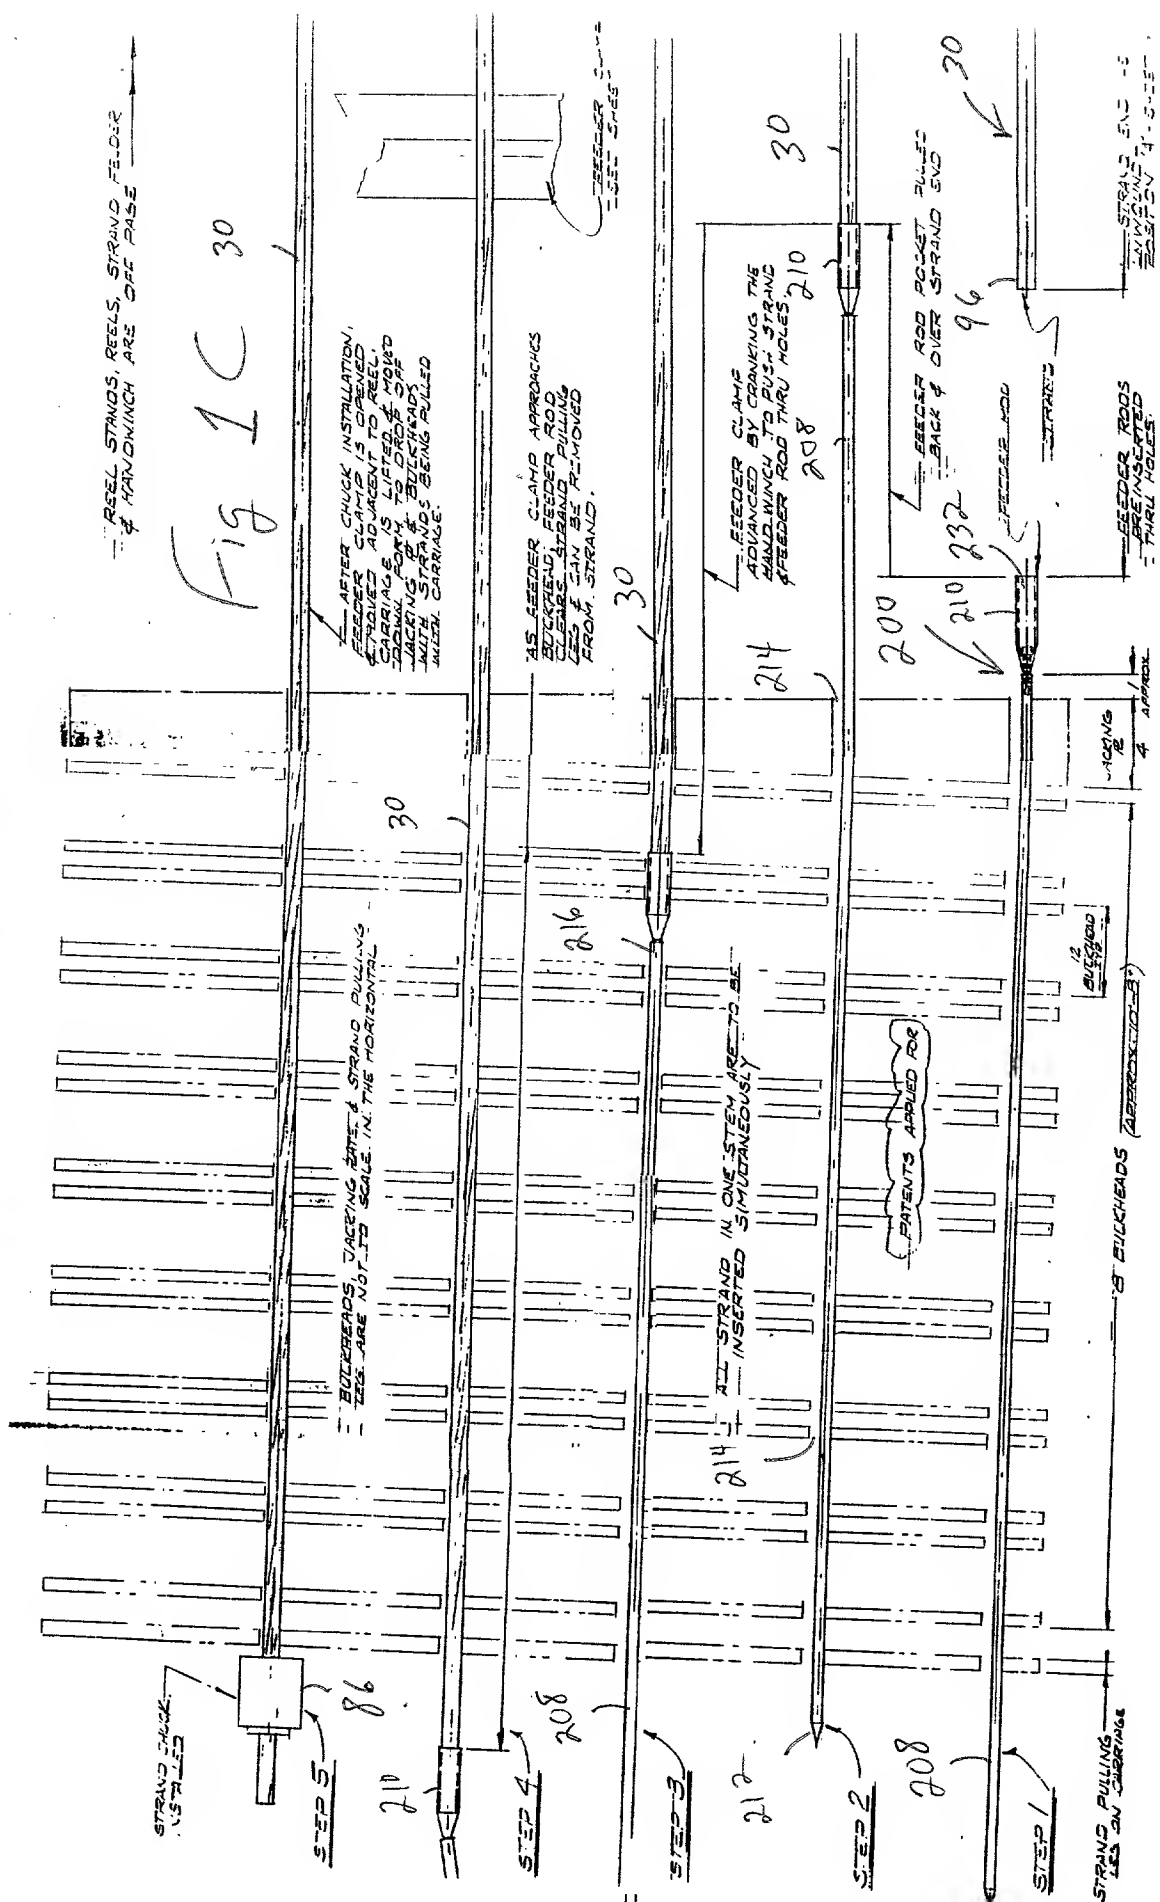


Fig 10

WIDTH OF FORM - 8' TO 15'

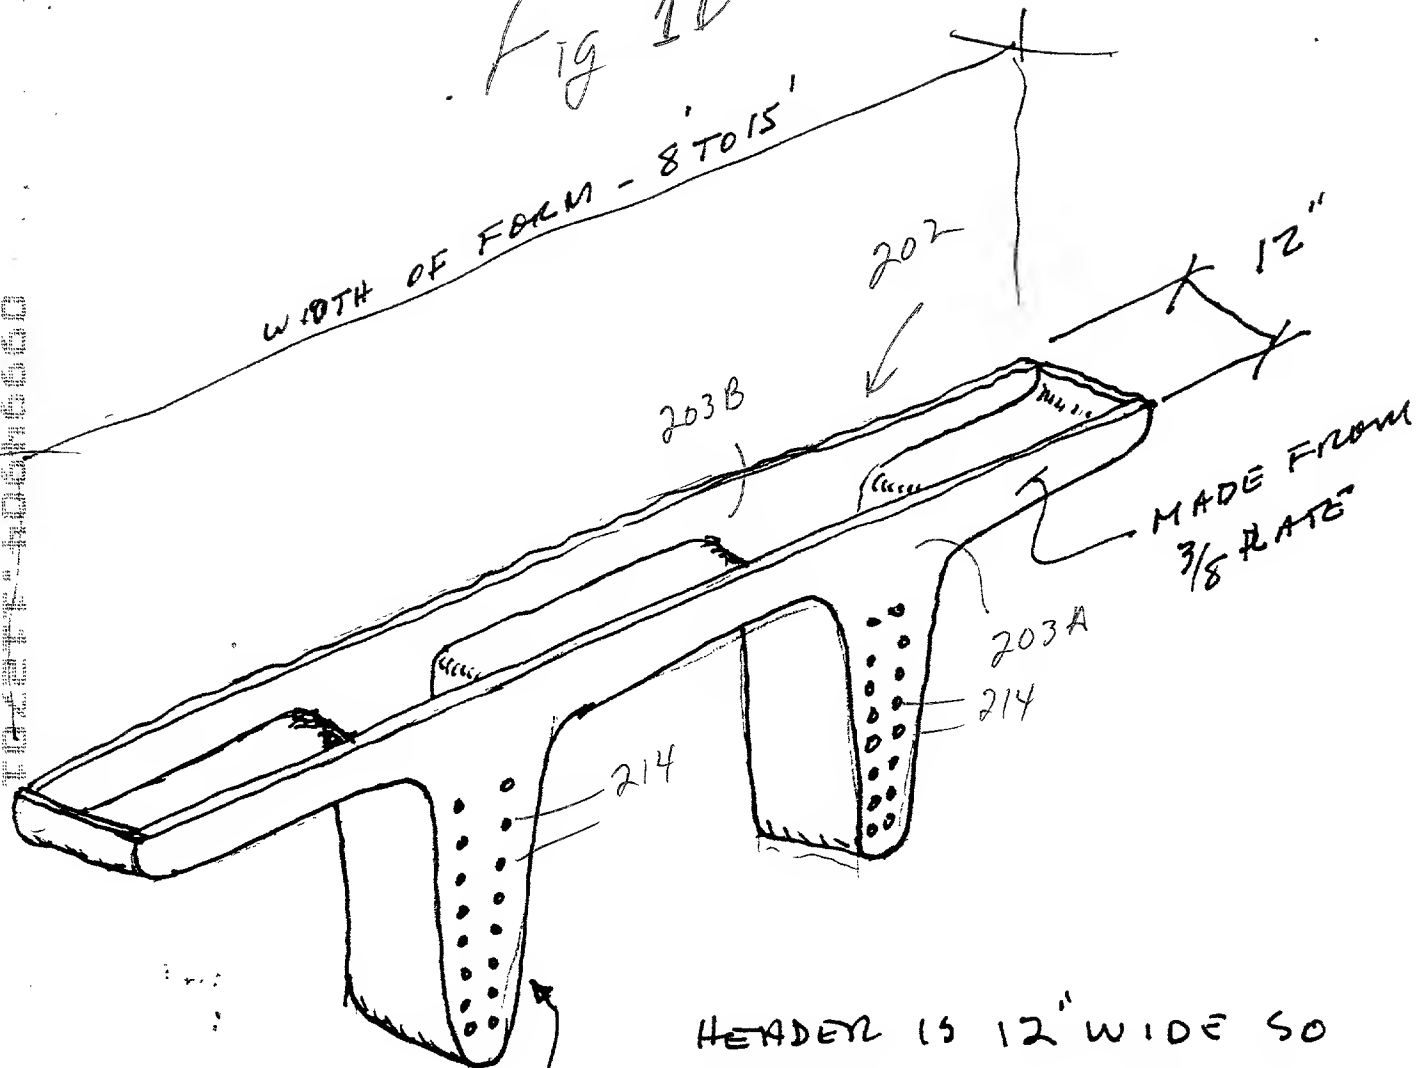


11-20-01
Kaf

VARIABLE #
OF HOLES

HEADER IS 12" WIDE SO
WORKER CAN GET INTO
SPACE BETWEEN RATES TO
CUT STRAND WITH TORCH OR
CUTTER WHEN REMOVING
PRODUCT FROM FORM AFTER
PART CURE OF CONCRETE.

TOGETHER

Fig 1 E

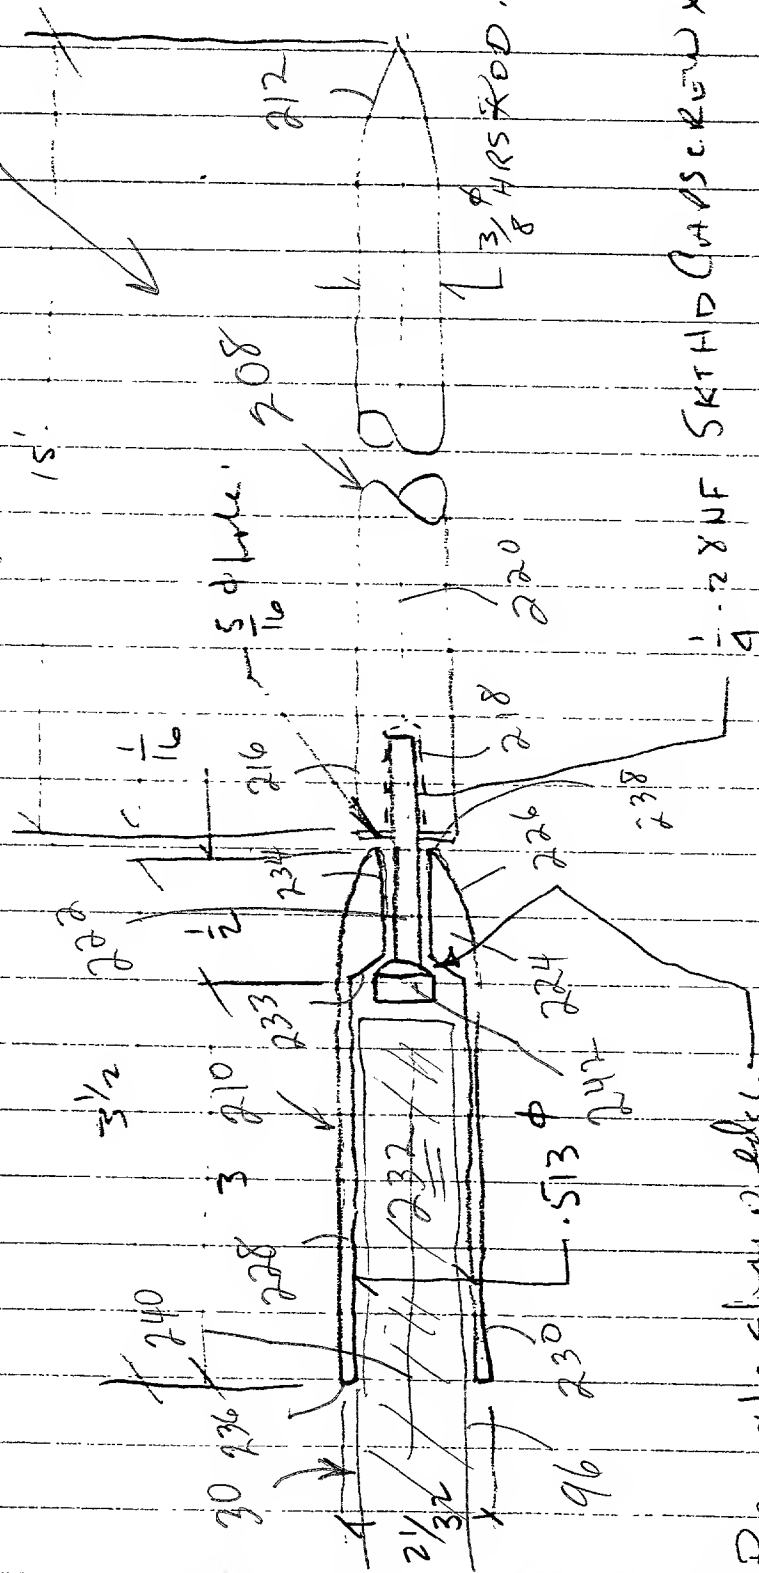

Remove sharp edge
on underside of
capscrew hd.

FOR $\frac{1}{2}$ STRAND

IN $\frac{5}{8}$ HOLES (1024 KEND T.D)

$\frac{9}{16} - \frac{5}{16} (1.600)$

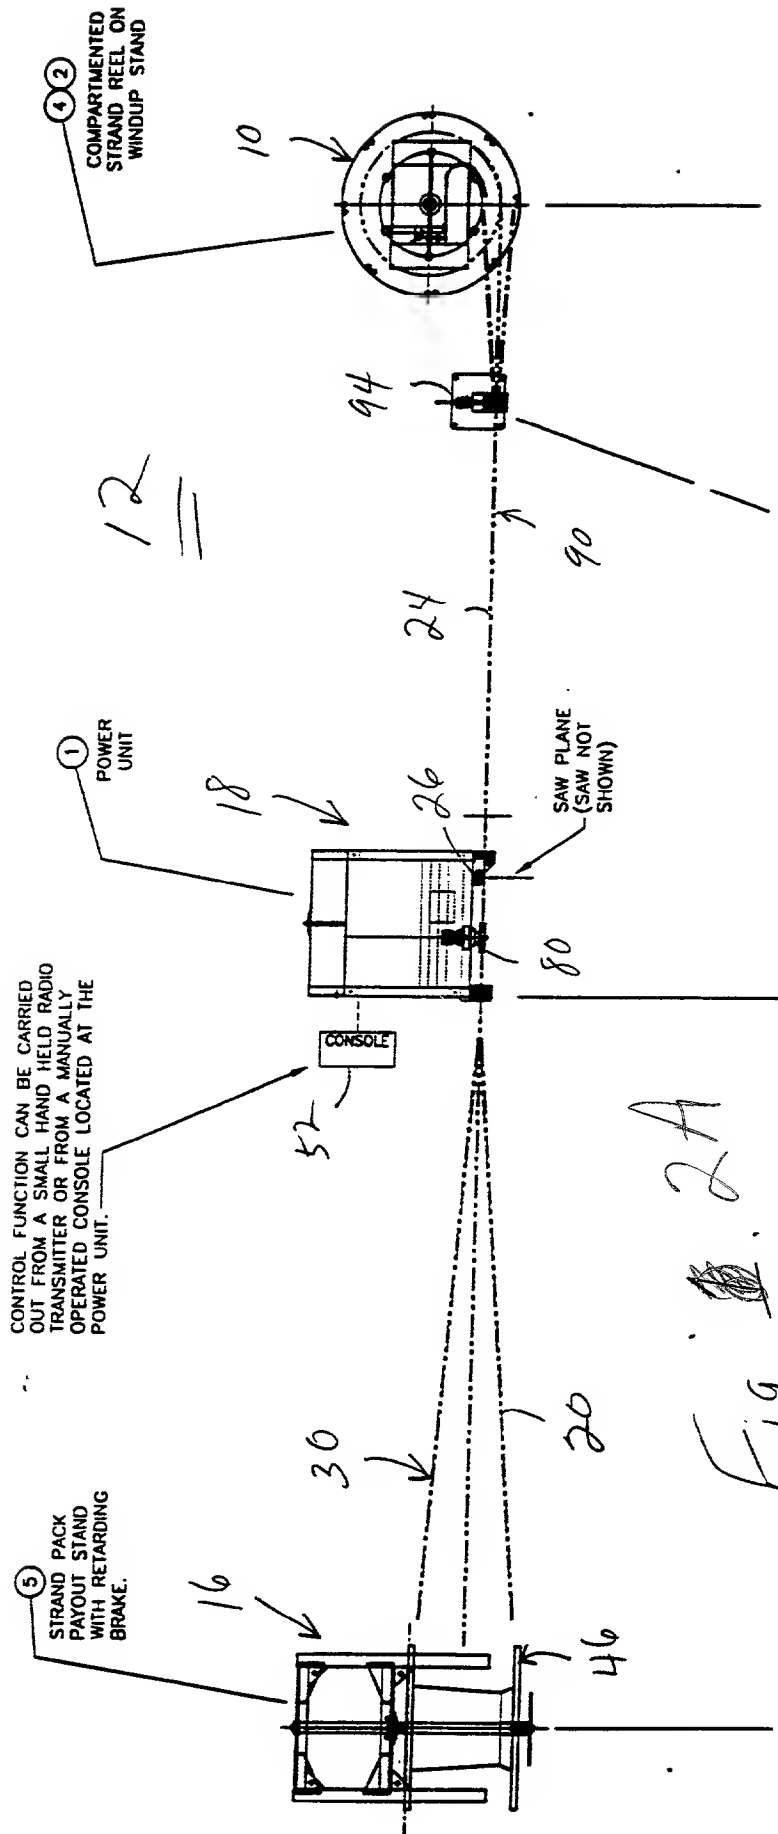


Fig. 2A

12


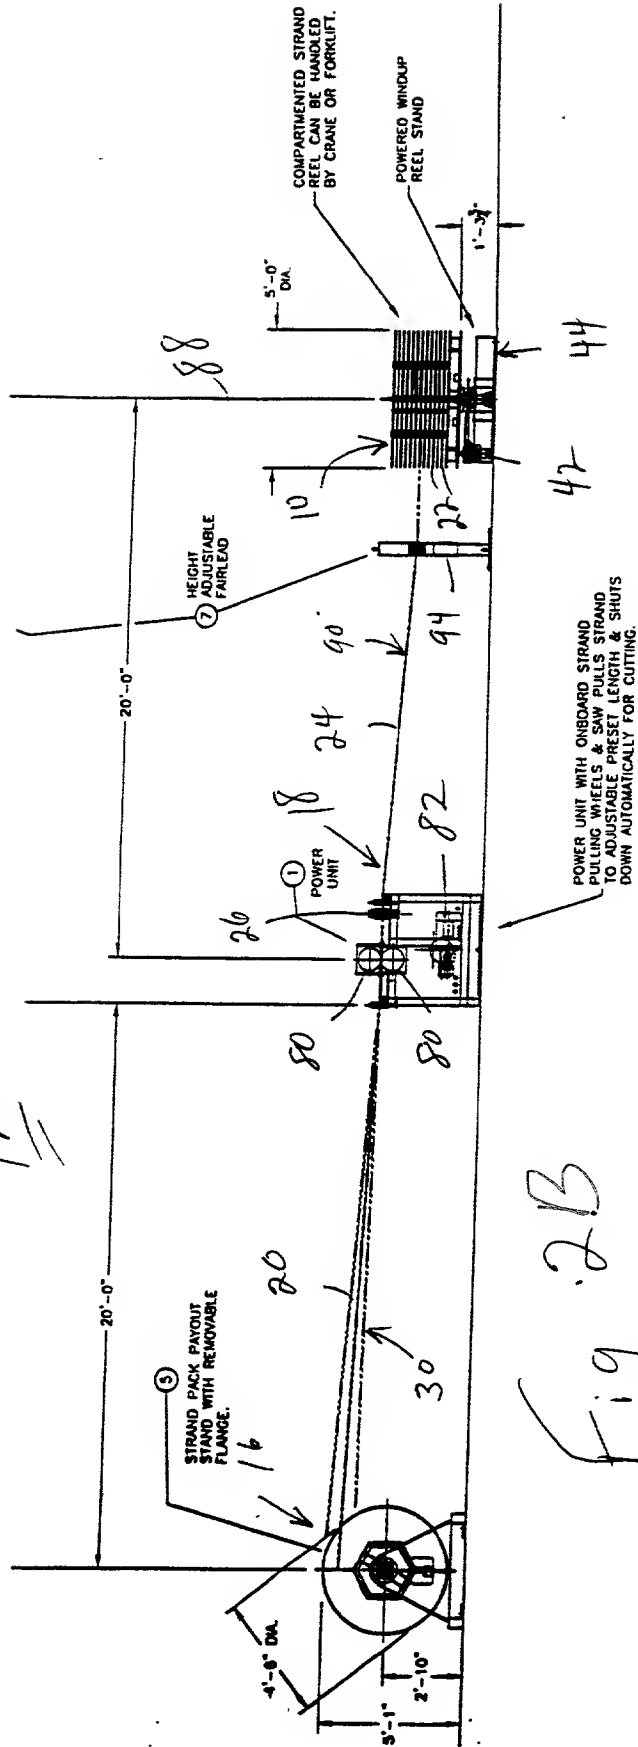




Fig. 2B

a) C_{10}H_8 (100%)	
100	100
99	99
98	98
97	97
96	96
95	95
94	94
93	93
92	92
91	91
90	90
89	89
88	88
87	87
86	86
85	85
84	84
83	83
82	82
81	81
80	80
79	79
78	78
77	77
76	76
75	75
74	74
73	73
72	72
71	71
70	70
69	69
68	68
67	67
66	66
65	65
64	64
63	63
62	62
61	61
60	60
59	59
58	58
57	57
56	56
55	55
54	54
53	53
52	52
51	51
50	50
49	49
48	48
47	47
46	46
45	45
44	44
43	43
42	42
41	41
40	40
39	39
38	38
37	37
36	36
35	35
34	34
33	33
32	32
31	31
30	30
29	29
28	28
27	27
26	26
25	25
24	24
23	23
22	22
21	21
20	20
19	19
18	18
17	17
16	16
15	15
14	14
13	13
12	12
11	11
10	10
9	9
8	8
7	7
6	6
5	5
4	4
3	3
2	2
1	1
0	0

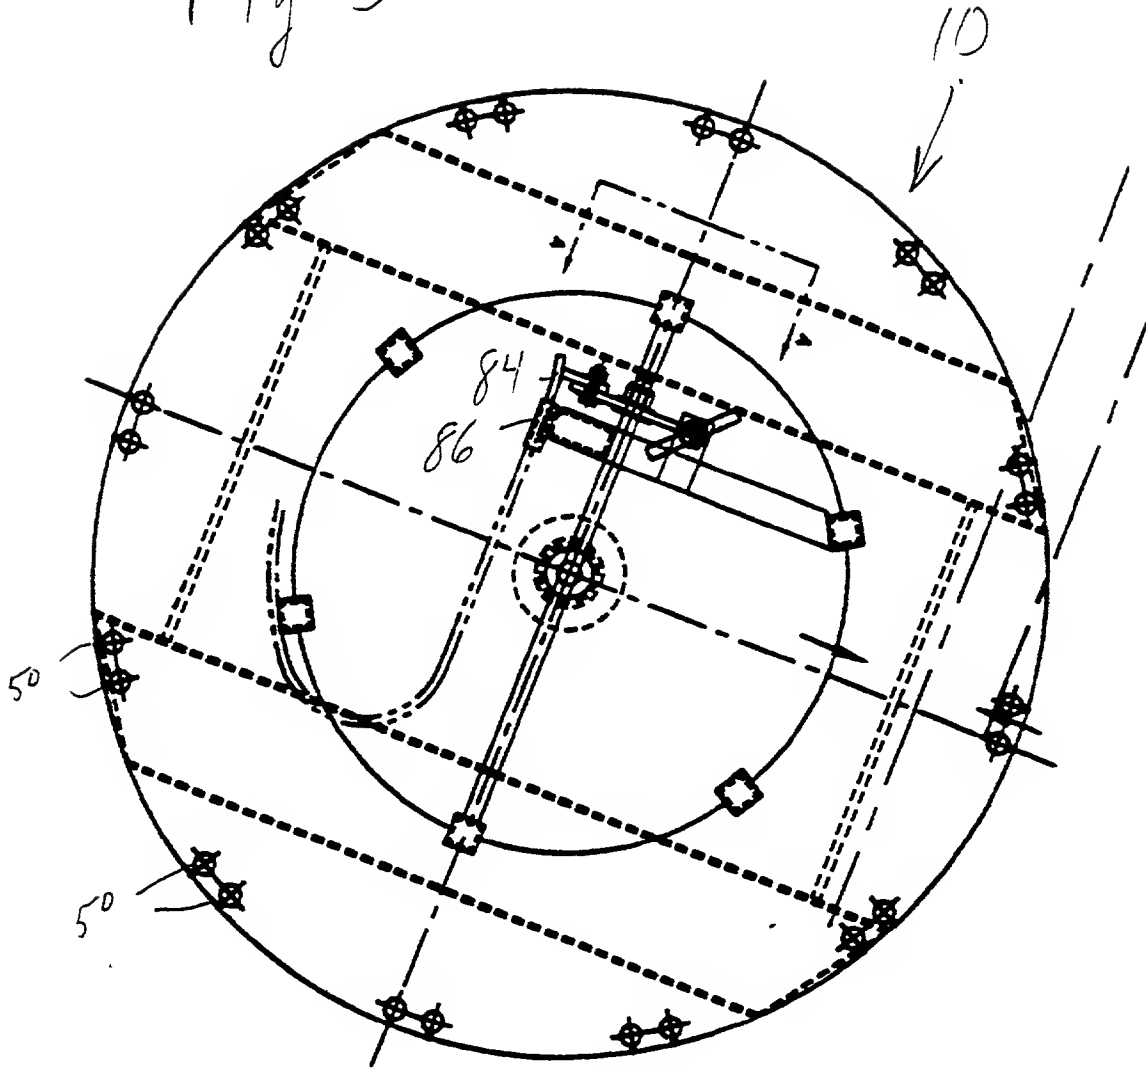

104237 40646650

Fig. 7

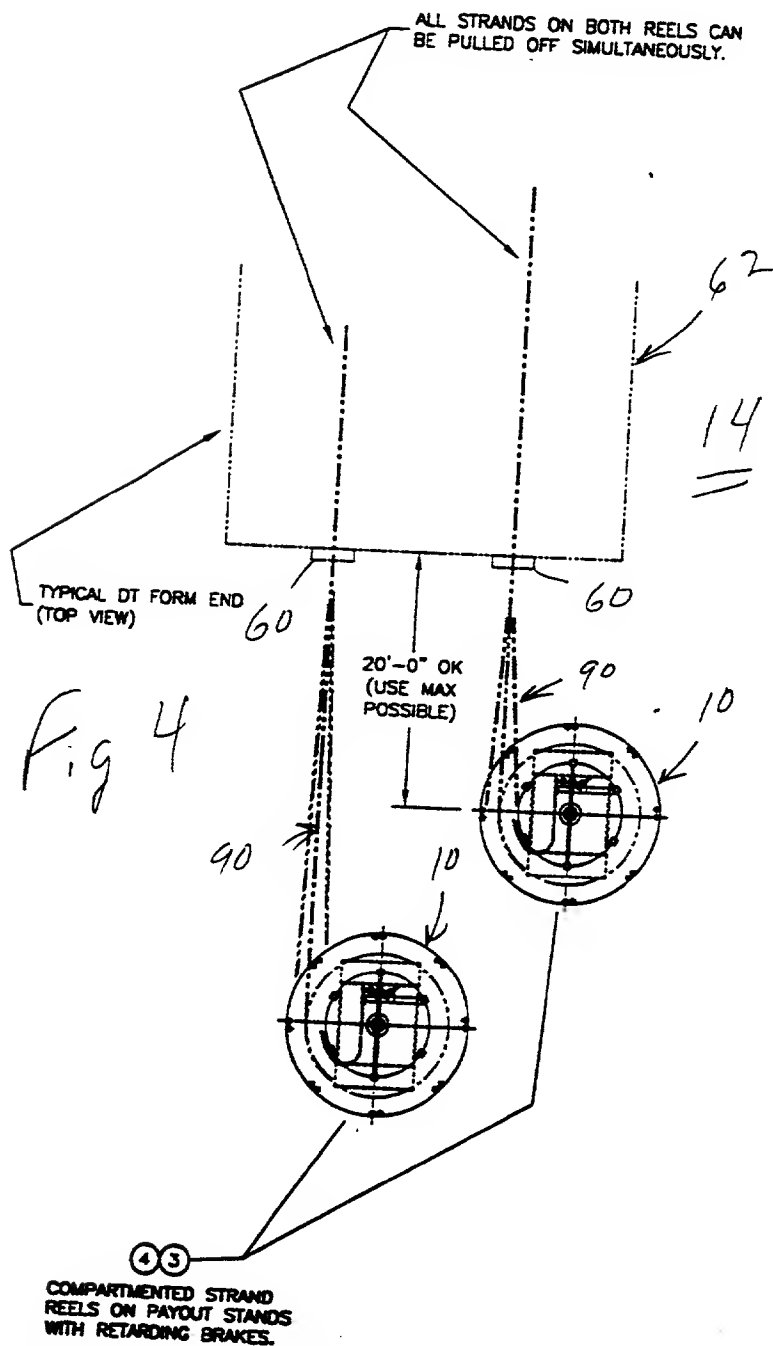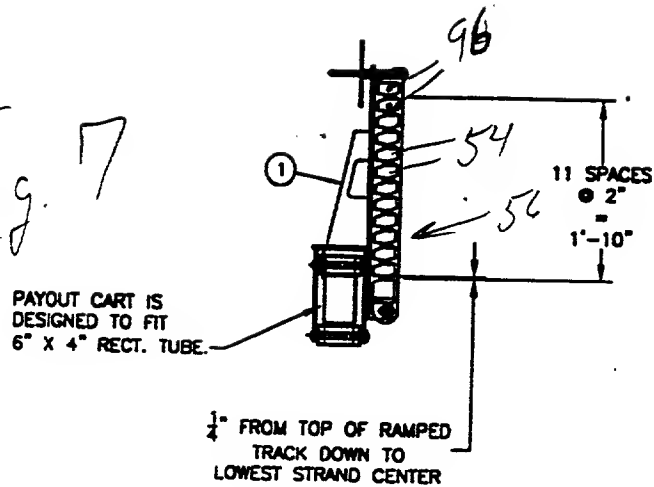

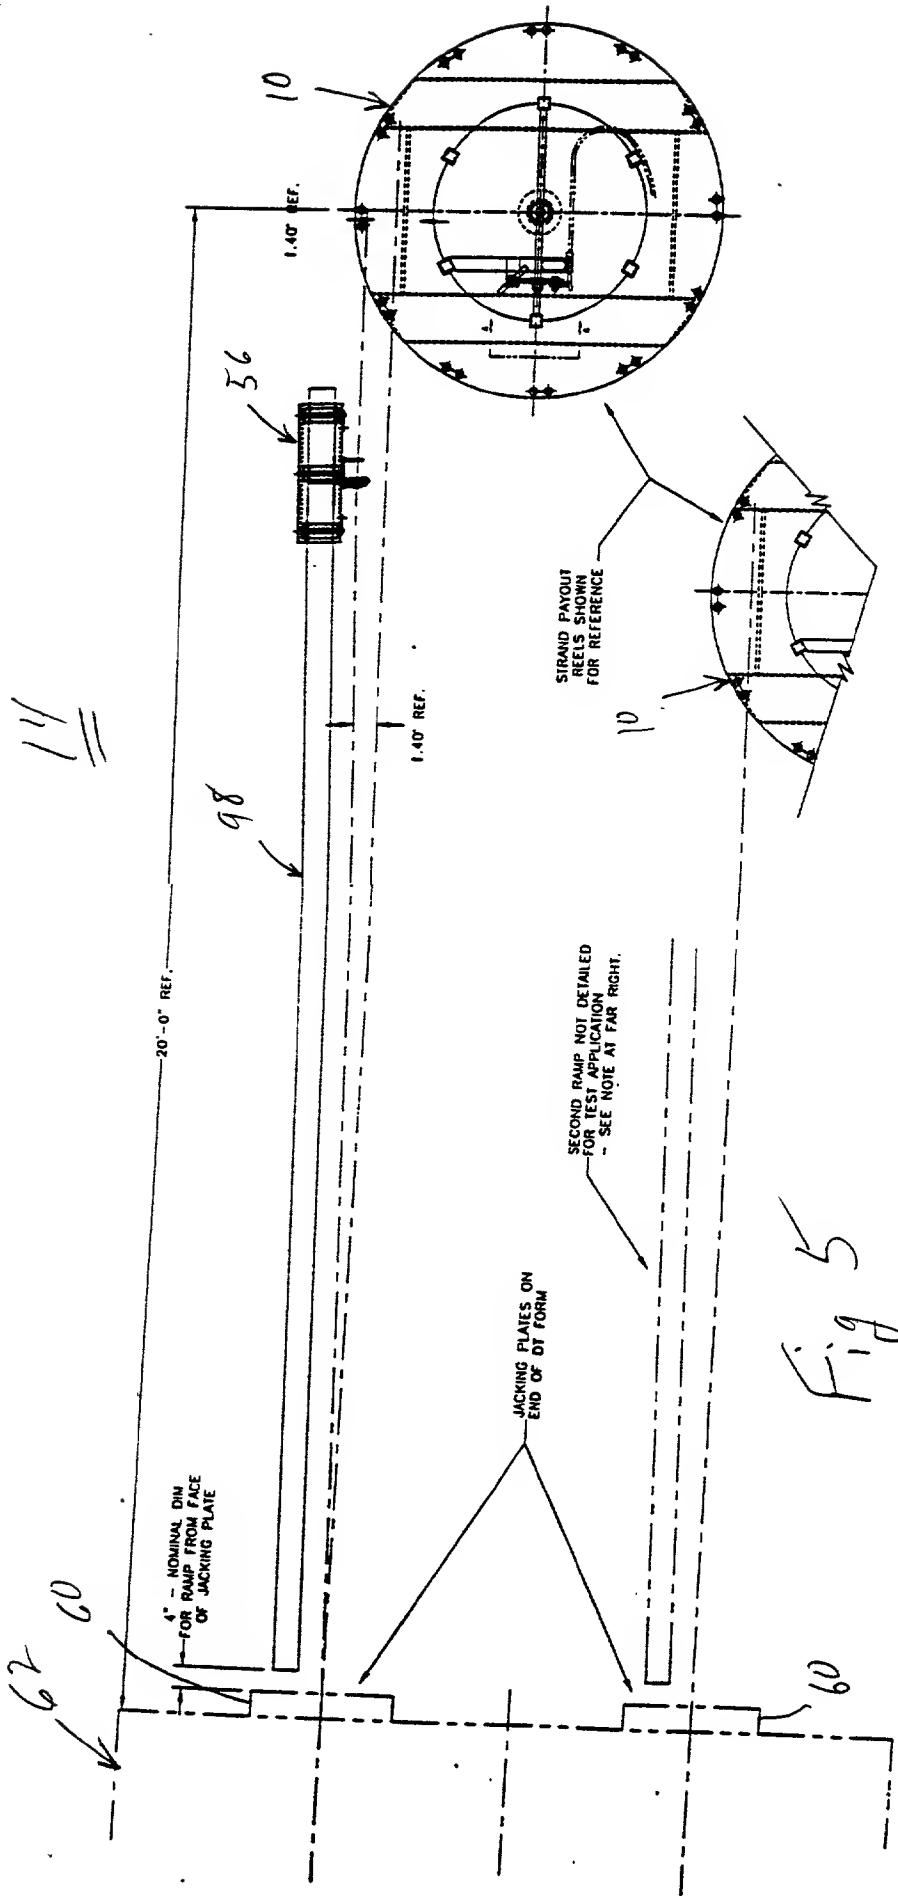
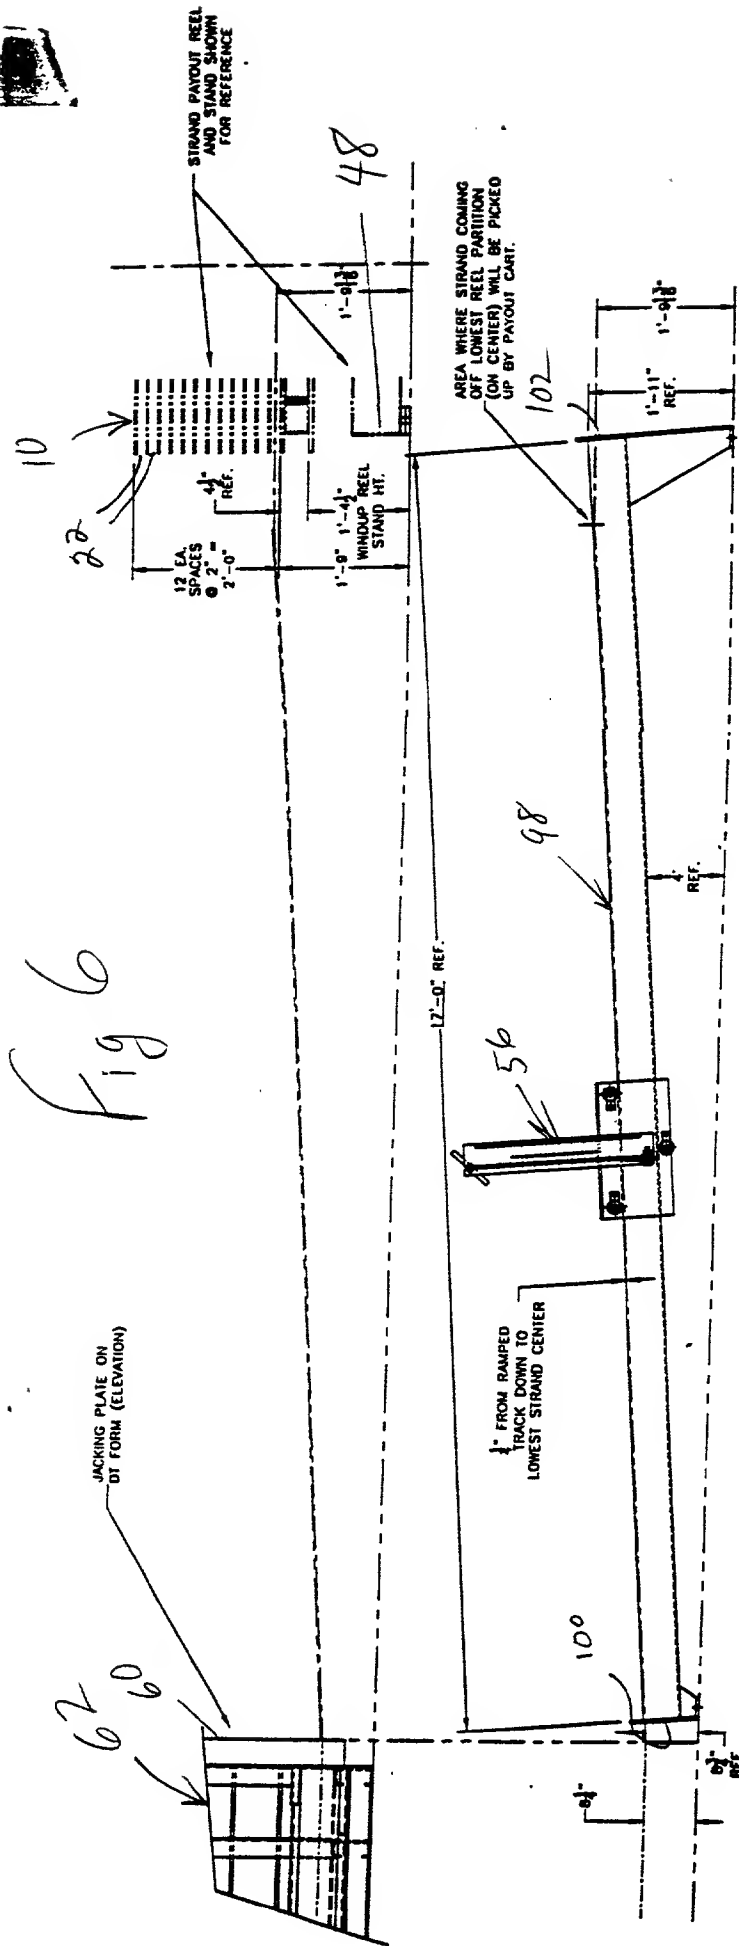


Fig 5

[illegible]

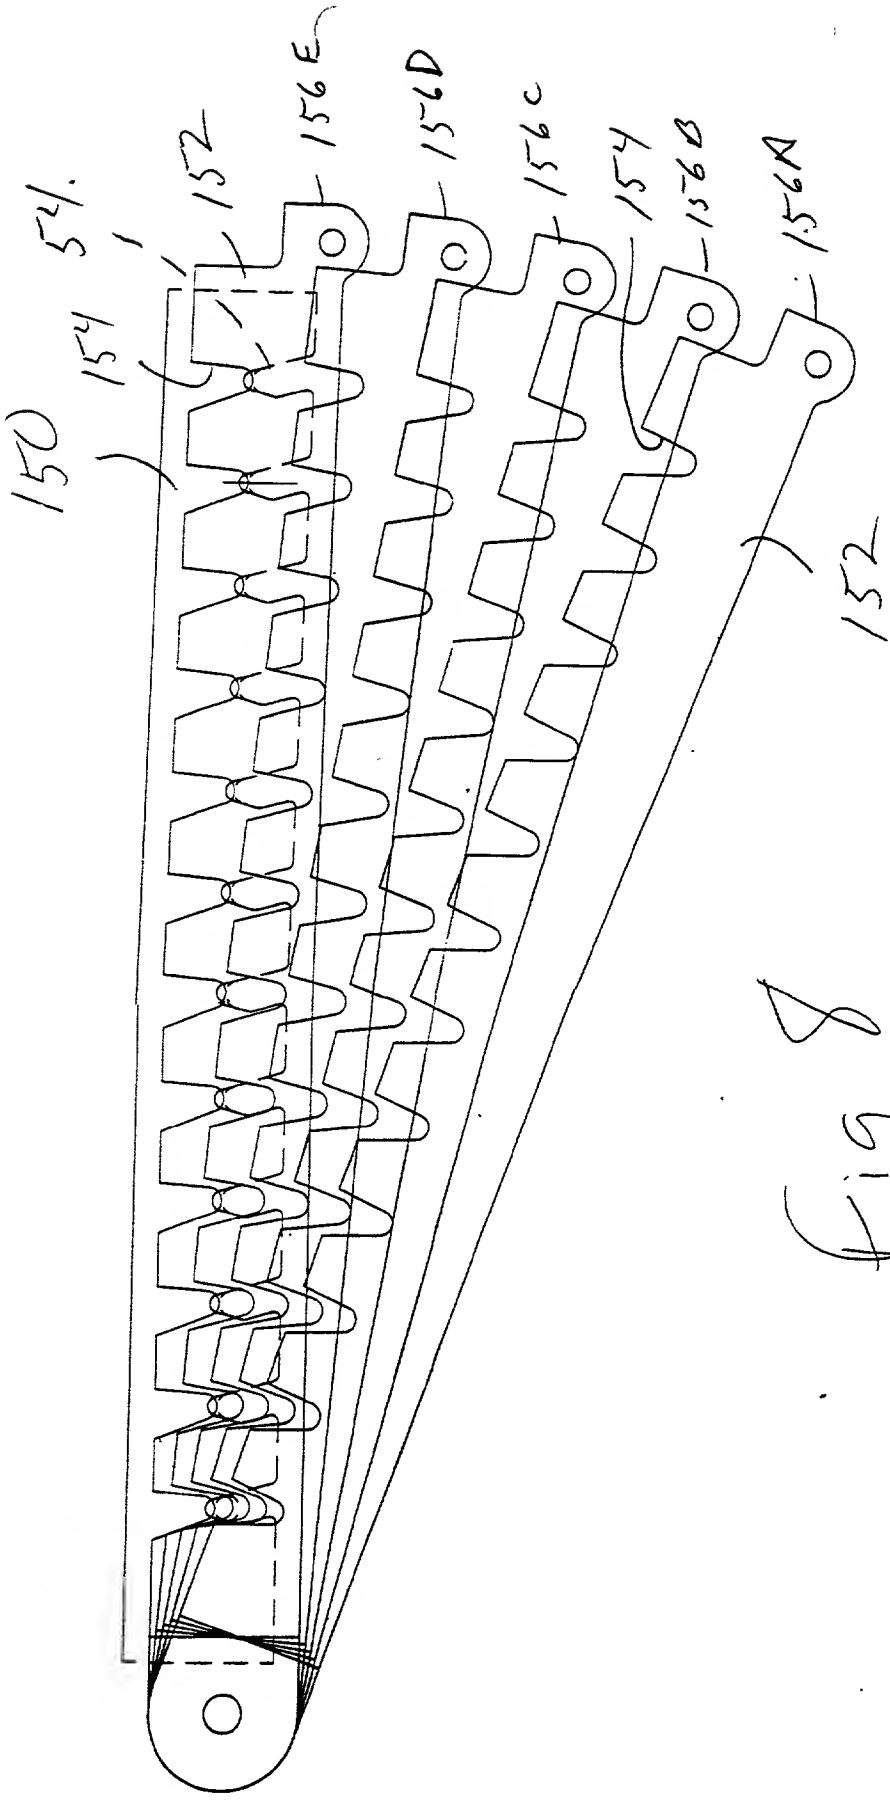


Fig 8

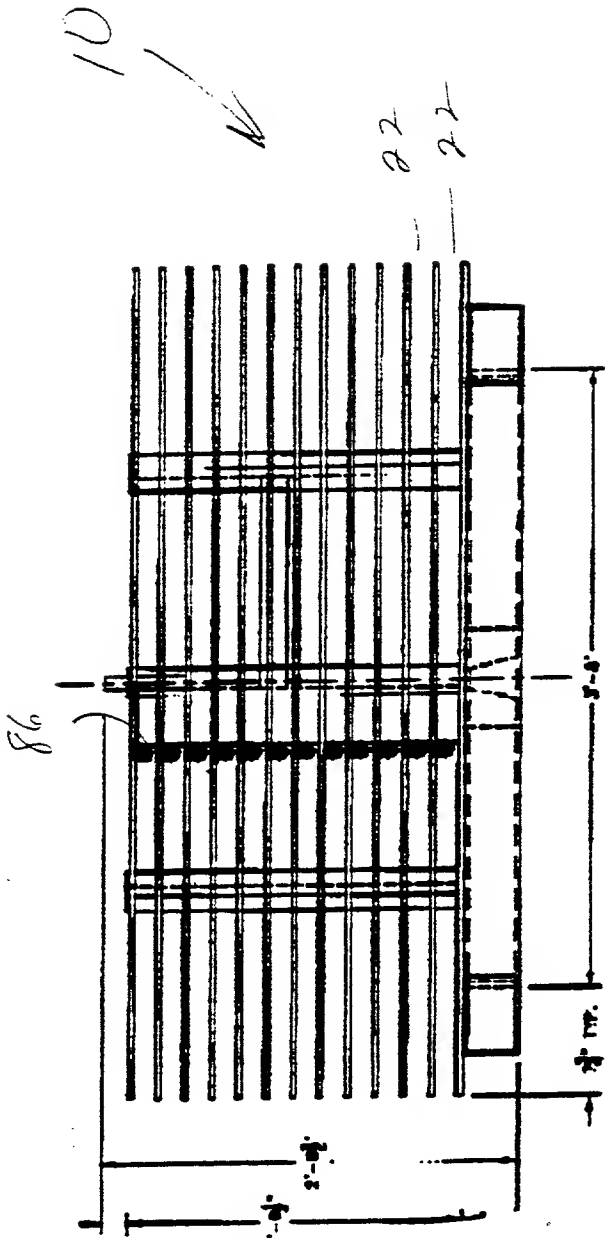


Fig 9

